



Pulse Systems Inc.

New Product Release

***Universal Klystron C-Band
Transmitter Systems***

Pulse Systems Inc.

100 Energy Drive

Canton, MA 02021

Telephone: 781-828-1142

Fax#781-828-8359


E-mail: sales@pulsesystem.com

Contact: John C. Lagadinos/ President & CEO



Pulse Systems Inc.

Universal Klystron C-Band Transmitter System Control Panel

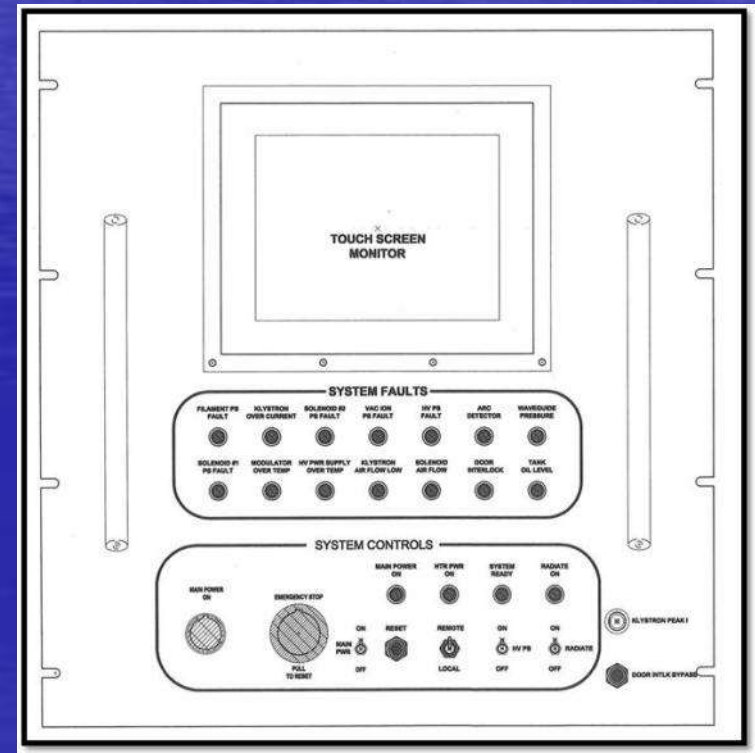



Universal Klystron C-Band Transmitter Systems

- *C-Band Universal Klystron*
- *CPI VKC-8388*
- *1 MW*






Universal Klystron C-Band Transmitter System Specifications & Features

Pulse Systems C-Band 1MW Specifications & Features

Klystron Type:	CPI-VKC-8388 Cathode Pulsed 1.0 MW 5600-5650 MHz
Cooling:	Forced Air Cooled
Prime Power:	3-Phase 208/240-50/60 Hz P.F. 0.9 Min. 10KVA
RF Phase Stability:	.09 Degrees Max. Pulse to Pulse
Pulse Overshoot:	Less than 3%
Ripple:	0.2% Max.
Droop:	0.2% Maxi.
PRF Stag Ratio:	Dual PRF: 3:2 and 5:4 External Supplied
PRF Pulse:	TTL Compatible, 250-1500 PPS BNC Connector
RF Pulse:	0-10 dBm 5.6 - 5.65 GHz
RF Pulse Width:	0.8 - 4.5 μ sec
Output RF Interface:	WR-187
Size in Inches:	Two Cabinets: 19" and 24" Wide, 42" Deep, 86" High
Est. Weight in Lbs:	1200 Lbs Total




Universal Klystron C-Band Transmitter System - Test Data

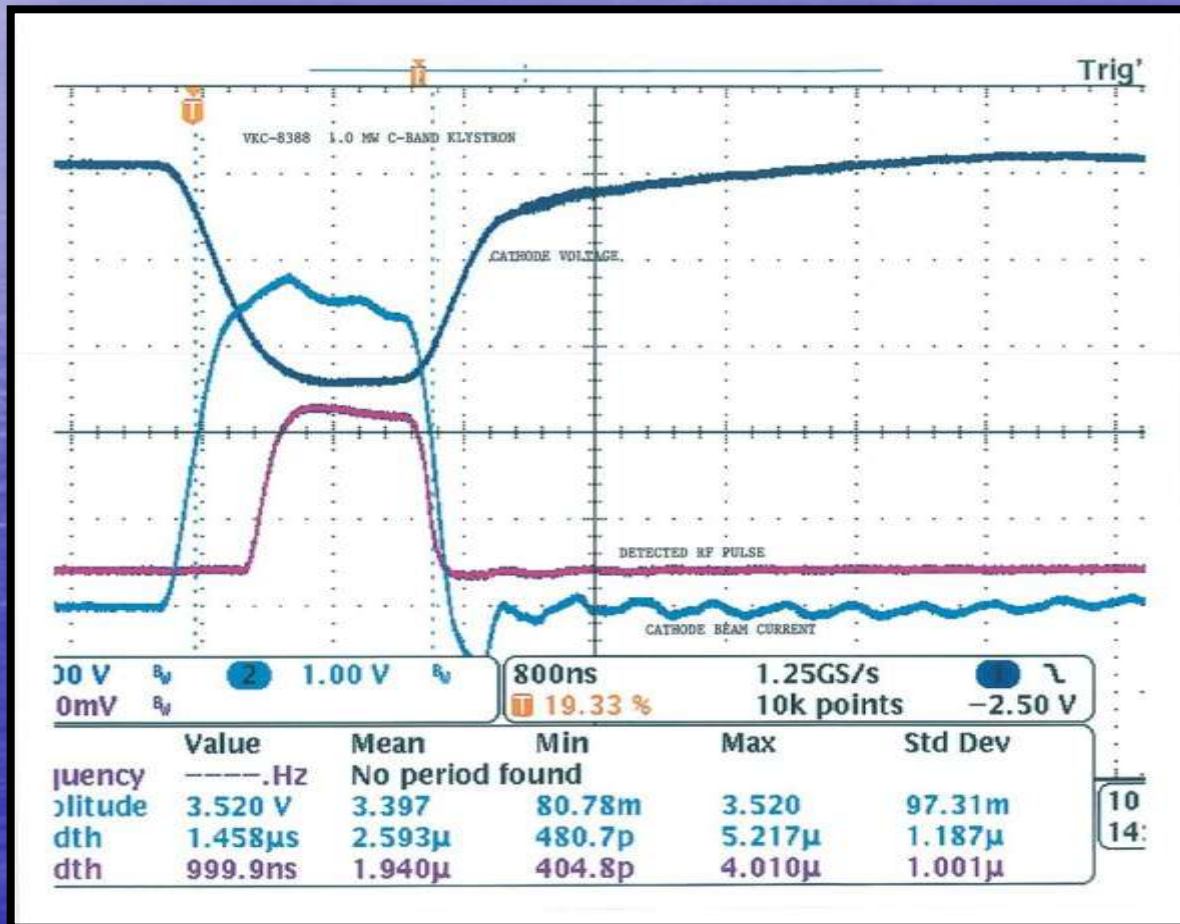



Universal Klystron C-Band Transmitter System - Test Data

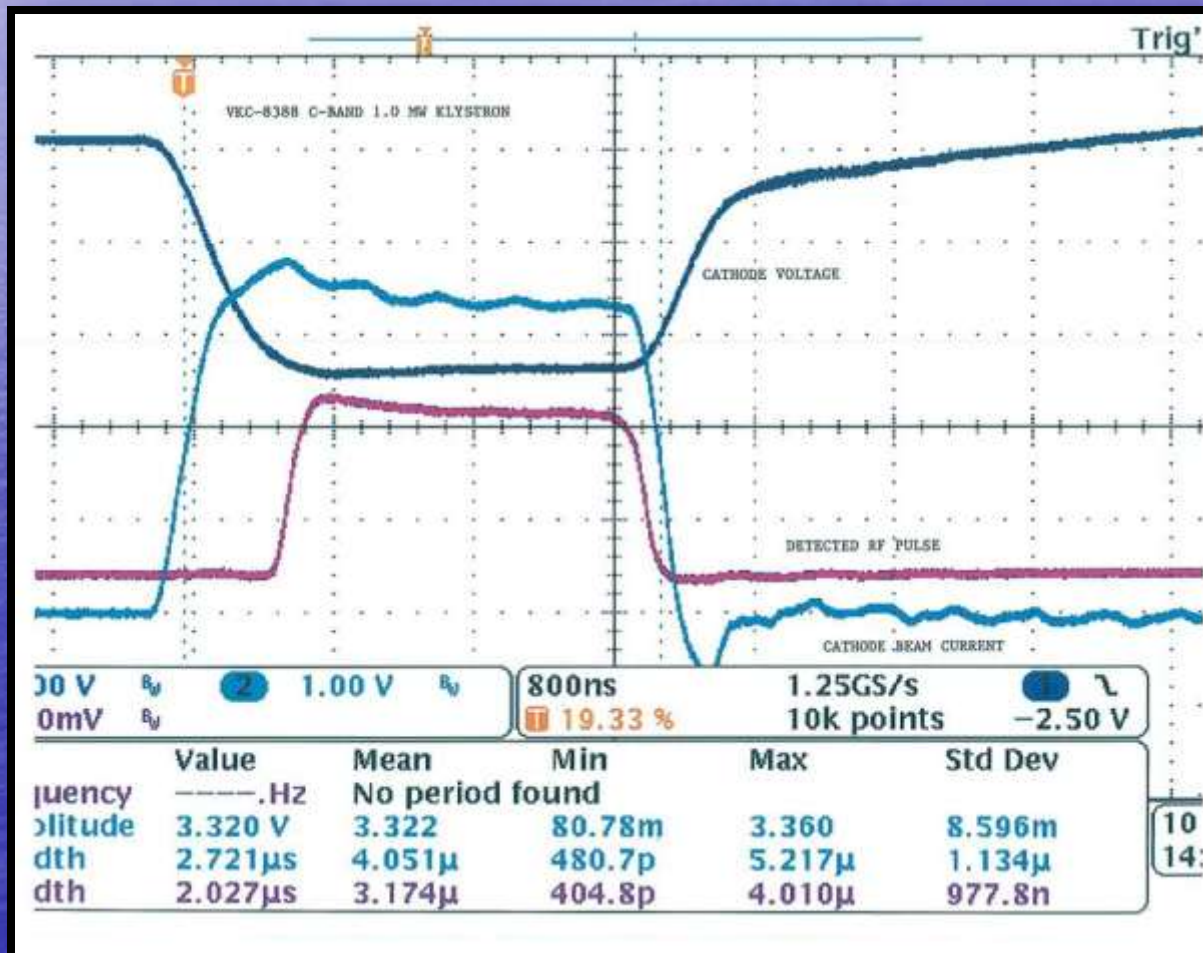



Universal Klystron C-Band Transmitter System - Test Data

